

VIBRATION RANGE


AFE TUBULAR

Convertisseurs électriques type cage

The wide range of AFE tubular electrical converters stands out for its durability and robustness, allowing multiple high-frequency pokers to be connected to the same equipment.



- 5 meter cable
- Voltage/frequency inputs available upon request:
 - Tri-phase: 230V 3~50Hz and 230V 3~60Hz
 - Single-phase: 230V 3~50Hz, 230V 3~60Hz and 110V 1~60Hz
- Protection structure in Ø30mm steel tube

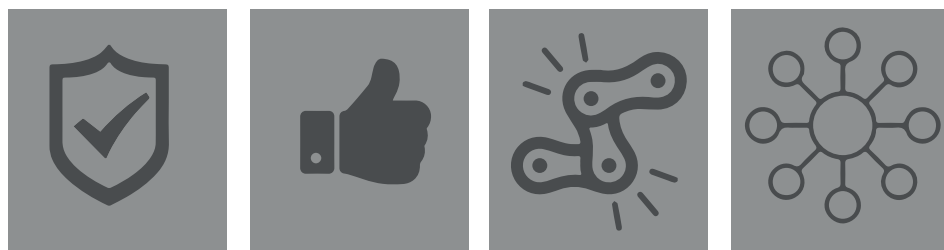

+ Safety

The low 42V safety voltage eliminates the possibility of electric shock.

+ Reliability

AFE tubular converters are manufactured with materials of high quality and resistance, guaranteeing a great durability.

+ Resistance

Robust cage for transport and protection with shock absorbers built-in for increased robustness.

+ Wide range

Available in single-phase and three-phase connections, to accommodate all user needs, and can power up to four Ø75mm poker heads.

Technical Data

MODEL	Weight (kg)	N° plugs	Input		Output	
			Power	Tension/Frequency	Power	Tension/Frequency
COMP. 1000M	20	1	1.3 KW 6A	230V 1 ~ 50Hz	1.0 KVA 13A	42V 3 ~ 200Hz
AFE 1000MT	23	1	1.3 KW 6A	230V 1 ~ 50Hz	1.0 KVA 13A	42V 3 ~ 200Hz
AFE 2000MT	32	2	2.0 KW 9A	230V 1 ~ 50Hz	1.6 KVA 23A	42V 3 ~ 200Hz
AFE 2000T	30	2	2.8 KW 4A	400V 3 ~ 50Hz	1.8 KVA 25A	42V 3 ~ 200Hz
AFE 2500T	34	3	4 KW 6A	400V 3 ~ 50Hz	2.5 KVA 35A	42V 3 ~ 200Hz
AFE 3500	59	3	5 KW 7A	400V 3 ~ 50Hz	3.5 KVA 50A	42V 3 ~ 200Hz
AFE 4500	68	4	7 KW 10A	400V 3 ~ 50Hz	4.5 KVA 61A	42V 3 ~ 200Hz
AFE 6000	75	4	8 KW 12A	400V 3 ~ 50Hz	6 KVA 82A	42V 3 ~ 200Hz